


# morsetti temprati per prese esterne hardened jaws for external grips

catalogo | catalogue

DENTATURA / pitch: 1/16"x90°

**MANDRINI / chucks**  
**SMW/AUTOBLOK - CMT**  
**BERG - FORKARDT**  
**GAMET - ROHM - SCHUNK**

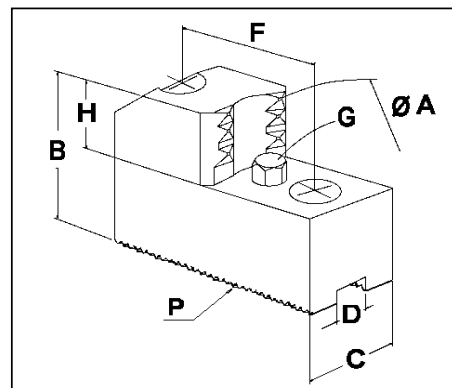

## MANDRINI / chucks Ø 140 - 160

|              |    |    |    |      |    |    |        |           |      | BERG                                 |                                      |
|--------------|----|----|----|------|----|----|--------|-----------|------|--------------------------------------|--------------------------------------|
|              |    |    |    |      |    |    |        |           |      | KH140                                | KH160                                |
| CODICE /code | B  | C  | D  | F    | G  | H  | DIN912 | P         | KG   | CAMPO DI PRESA<br>gripping range (A) | CAMPO DI PRESA<br>gripping range (A) |
| 40.14.01/MTE | 37 | 30 | 10 | 17,5 | M6 | 13 | M10    | 1/16"x90° | 0,30 | 36-60                                | 46-80                                |
| 40.14.02/MTE | "  | "  | "  | "    | "  | "  | "      | "         | 0,22 | 60-85                                | 71-105                               |
| 40.14.03/MTE | "  | "  | "  | "    | "  | "  | "      | "         | 0,22 | 85-110                               | 96-130                               |
| 40.14.04/MTE | "  | "  | "  | "    | "  | "  | "      | "         | 0,24 | 110-135                              | 120-154                              |

## MANDRINI / chucks Ø 160 - 175

| MANDRINI / chucks Ø 160 - 175 |    |    |    |      |    |    |        |           |      | ROHM                                 |                                      | SCHUNK                               |
|-------------------------------|----|----|----|------|----|----|--------|-----------|------|--------------------------------------|--------------------------------------|--------------------------------------|
|                               |    |    |    |      |    |    |        |           |      | KFD-HS160                            | KFD-HS175                            | HSG160-46                            |
| CODICE /code                  | B  | C  | D  | F    | G  | H  | DIN912 | P         | KG   | CAMPO DI PRESA<br>gripping range (A) | CAMPO DI PRESA<br>gripping range (A) | CAMPO DI PRESA<br>gripping range (A) |
| 41.16.31/MTE                  | 38 | 34 | 12 | 2x15 | M6 | 20 | M8     | 1/16"x90° | 0,38 | 30-70                                | 40-85                                | 35-64                                |
| 41.16.32/MTE                  | "  | "  | "  | "    | "  | "  | "      | "         | 0,32 | 60-100                               | 70-115                               | 64-94                                |
| 41.16.33/MTE                  | "  | "  | "  | "    | "  | "  | "      | "         | 0,31 | 90-130                               | 100-145                              | 94-140                               |